# DENON®

## DSW-1H
**Wireless Subwoofer**

# Quick Start Guide

# BEFORE YOU BEGIN

The DSW-1H is designed as a Wireless Subwoofer to be connected to your HEOS product.

Make sure you have the following items in working order:
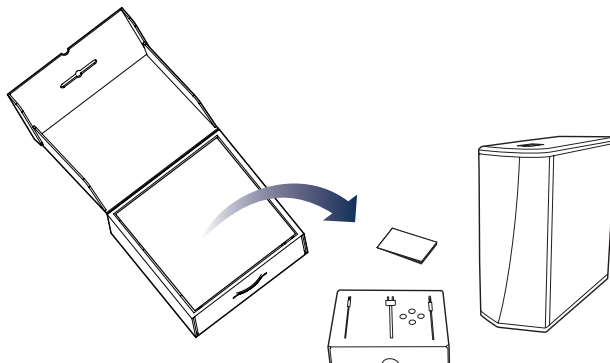
Wi-Fi Router &
Internet Connection

Apple iOS, Android or Kindle
mobile device connected to
your network

Other
HEOS devices

# STEP 1: UNPACK

Carefully unpack your DSW-1H.

Verify that the following items are included in the box.
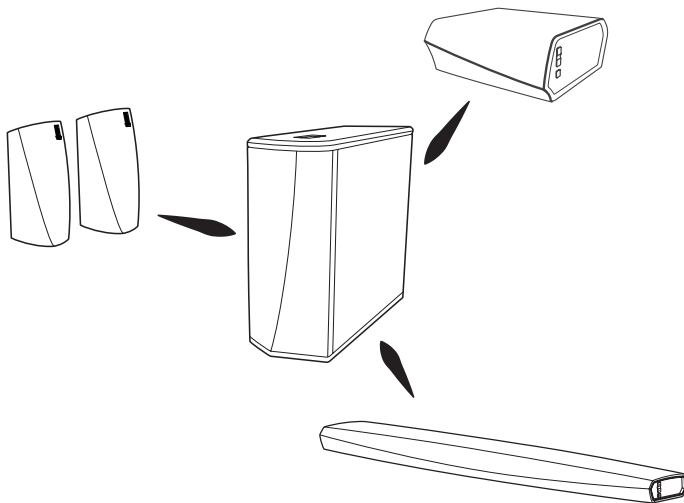
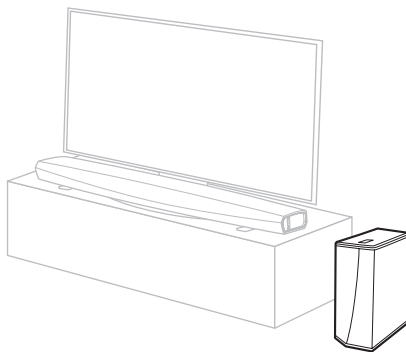| Power cord | Ethernet cable | 3.5 mm setup cable | Feet |

# STEP 2: PLAN

Determine which room and HEOS device you wish to group with this DSW-1H.

# STEP 3: PLACE

Place the DSW-1H in a convenient location in the same room as the other HEOS devices you wish to group the Subwoofer with.
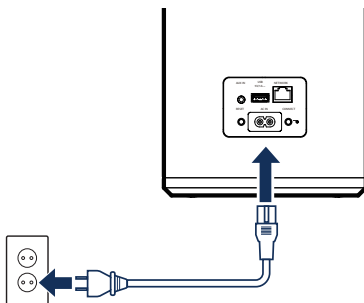
**OPTIONAL**
Attach the included feet to the four corners of the DSW-1H's side if you are placing it on horizontally.

# STEP 4: CONNECT

Connect the power cord to the DSW-1H and a wall outlet.

### OPTIONAL

If you are connecting the DSW-1H to a wired network, connect the included Ethernet cable between the DSW-1H and your router.

Do not connect the Ethernet cable if you are connecting your DSW-1H to a wireless network.

# STEP 5: CONTROL

1 Download the HEOS App.
Go to the Apple App Store, Google Play or Amazon App Store and search for "HEOS" to download and install.

2 Launch the HEOS App and follow the instructions in the app to add the DSW-1H to your network and then group your DSW-1H with the desired HEOS device.

Download on the
**App Store**

GET IT ON
**Google Play**

**amazon**appstore

# STEP 6: ADD DEVICE

① 🔧 Music

② ← Settings
Add Device ›
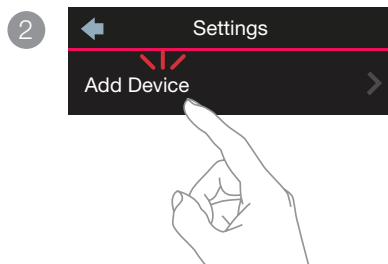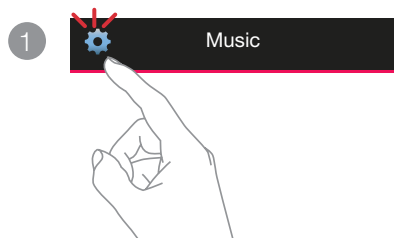
# ENJOY!

## OWNER'S MANUAL

- For more information, visit **www.denon.com**
- Refer to the Online Manual for other functions information
  and operation procedure details.
  **manuals.denon.com/DSW1H/EU/EN/**

# BASIC TROUBLESHOOTING

**My HEOS device won't connect to my network using the audio cable**

• Make sure your mobile device is connected to your wireless network before setting up your HEOS device.

• Alternatively, you can connect your HEOS device to your network router using the included Ethernet cable. Once connected via Ethernet, the HEOS by Denon App should recognize the HEOS device and you can manually move it to your wireless network using *Settings/My Devices/Device_Name/Advanced/Network Settings*.

**Connecting to a network using WPS**

If your wireless router supports WPS (Wi-Fi Protected Setup™) your HEOS wireless device can optionally connect to your network using the "Push Button" method by following these steps:

1. Press the WPS button on your router.
2. Within 2 minutes, Press and Hold the Connect button on the rear panel of the HEOS device for 5 seconds.
3. The LED on the front of the HEOS device will flash green for several seconds as it connects to your router.
4. When the connection is complete, the LED on the front of the HEOS device will turn solid blue.

**Resetting your device**

Resetting your HEOS device will clear out the wireless network settings, EQ, and name but retain it's current software. You will have to use Settings->Add Device to reconnect the device to your home network before it can be used.

To reset your HEOS device, gently insert a small paperclip into the Reset button hole on the back and hold it in until the front LED begins to flash amber.

# AVANT DE COMMENCER

Le DSW-1H est conçu comme un subwoofer
sans fil à connecter à votre produit HEOS.

Assurez-vous que les éléments suivants fonctionnent correctement:

Routeur Wi-Fi et
Connection Internet

Appareil mobile  Apple iOS,
Android ou Kindle connecté à
votre réseau

Autres dispositifs
HEOS